



# Stud Remover & Installer Kit

SAE

## Features


- Unique design allows the removal and installation of studs without damaging the threads
- Suits all popular metric automotive studs
- Each stud size has one tool for removal and one tool for installation
- Removal tool does not damage threads
- Installation tool allows tightening and torque without thread damage

## Stud Sizes

- 5/16"x18,
- 5/16"x24,
- 3/8"x16,
- 3/8"x24,
- 7/16"x14



## Removal

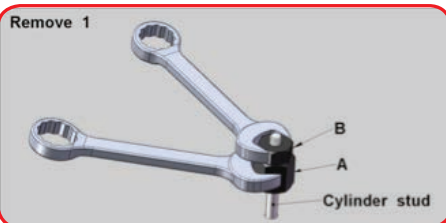


- Screw remover on to stud.
- Use two wrenches to tighten and lock A & B



- Use wrench on A and remove stud.

## Installation

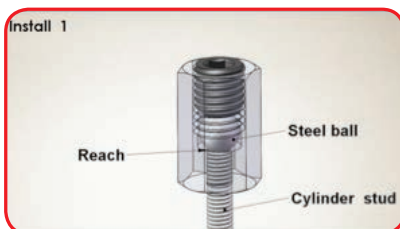

- Screw installer onto stud to make contact with steel ball.
- Screw stud into cylinder hole.



- Loosen set screw to release pressure.
- Remove installer from stud.



Scan this QR barcode with your mobile device to view demonstration video online



71121 Stud Remover & Installer Kit – SAE

### PBT USA Inc

13795 Rider Trail North  
Suite #109  
Earth City, MO 63045  
USA

Phone: 314 219 0999  
Fax: 314 219 0097  
Toll Free: 877 PBT USA4  
877 728 8724

Internet: [www.pbtusa.com](http://www.pbtusa.com)  
Email: [sales@pbtusa.com](mailto:sales@pbtusa.com)

### PBT Australia Pty Ltd

A.B.N. 72 067 983 475  
13/121 Kerry Road  
Archerfield QLD 4108  
Australia

Phone: +61 7 3274 3800  
Fax: +61 7 3275 3251

Internet: [www.pbtusa.com](http://www.pbtusa.com)  
Email: [sales@pbtusa.com](mailto:sales@pbtusa.com)